

### Features



- Adopt FRD chip
- Low forward Voltage drop
- Fast reverse recovery time
- High frequency operation
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Guard ring for enhanced ruggedness and long term reliability

### Typical Applications

Typical applications are in switching power supplies, converters, freewheeling diodes, and reverse battery protection.

### Mechanical Data

- **Package:** TO-220AB/ITO-220AB  
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** As marked

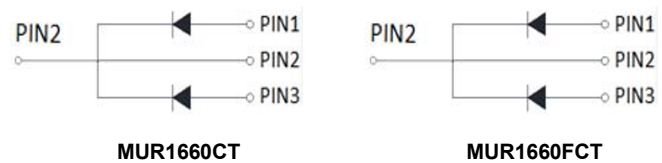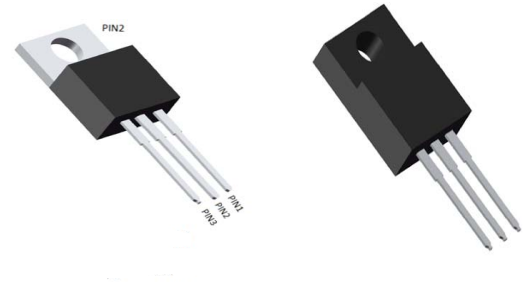

### ■Maximum Ratings (T<sub>j</sub>=25°C Unless otherwise specified )

| PARAMETER                                                                                   | SYMBOL           | UNIT             | MUR1660CT/FCT  |
|---------------------------------------------------------------------------------------------|------------------|------------------|----------------|
| Device marking code                                                                         |                  |                  | MUR1660CT /FCT |
| Repetitive Peak Reverse Voltage                                                             | VRRM             | V                | 600            |
| Average Rectified Output Current<br>@60Hz sine wave, R-load, T <sub>c</sub> (FIG.1)         | I <sub>O</sub>   | A                | 16             |
| Surge(Non-repetitive)Forward Current<br>@60Hz half sine-wave, 1 cycle, T <sub>j</sub> =25°C | IFSM             | A                | 180            |
| Current Squared Time @1ms≤t≤8.3ms<br>T <sub>j</sub> =25°C,                                  | I <sup>2</sup> t | A <sup>2</sup> s | 41             |
| Storage Temperature                                                                         | T <sub>stg</sub> | °C               | -55 ~ +175     |
| Junction Temperature                                                                        | T <sub>j</sub>   | °C               | -55 ~ +175     |
| Typical Junction capacitance @4V,1MHz                                                       | C <sub>j</sub>   | pF               | 40             |

### ■Electrical Characteristics

| PARAMETER                                                 | SYMBOL     | UNIT | TEST CONDITIONS                                            | Min | Typ   | Max  |
|-----------------------------------------------------------|------------|------|------------------------------------------------------------|-----|-------|------|
| Instantaneous forward voltage drop per diode              | $V_{FM}$   | V    | $I_F=8.0A$ @ $T_J=25^{\circ}C$                             | -   | 1.55  | 1.75 |
|                                                           |            |      | $I_F=8.0A$ @ $T_J=150^{\circ}C$                            | -   | 1.45  | 1.6  |
| DC reverse current at rated DC blocking voltage per diode | $I_{RRM1}$ | uA   | $V_{RM}=V_{RRM}$<br>$T_J=25^{\circ}C$                      | -   | -     | 5.0  |
|                                                           | $I_{RRM2}$ |      | $V_{RM}=V_{RRM}$<br>$T_J=150^{\circ}C$                     | -   | 40    | 200  |
| Reverse Recovery Time                                     | $T_{rr}$   | ns   | $I_F=0.5A$ $I_{RM}=1A$<br>$I_{RR}=0.25A$ $T_J=25^{\circ}C$ | -   | 35    | 50   |
|                                                           |            |      | $T_J=25^{\circ}C$                                          | -   | 57.0  | -    |
|                                                           |            |      | $T_J=125^{\circ}C$                                         | -   | 90.5  | -    |
| Peak recovery current                                     | $I_{RRM}$  | A    | $T_J=25^{\circ}C$                                          | -   | 3.45  | -    |
|                                                           |            |      | $T_J=125^{\circ}C$                                         | -   | 6.25  | -    |
| Reverse recovery charge                                   | $Q_{rr}$   | nC   | $T_J=25^{\circ}C$                                          | -   | 99.1  | -    |
|                                                           |            |      | $T_J=125^{\circ}C$                                         | -   | 262.2 | -    |

### ■Thermal Characteristics ( $T_J=25^{\circ}C$ Unless otherwise specified )

| PARAMETER          |                           | SYMBOL           | UNIT          | MUR1660CT/FCT |
|--------------------|---------------------------|------------------|---------------|---------------|
| Thermal Resistance | Between junction and case | $R_{\theta J-C}$ | $^{\circ}C/W$ | 2.0           |
| Thermal Resistance | Between junction and Air  | $R_{\theta J-A}$ | $^{\circ}C/W$ | 50            |

### ■Ordering Information (Example)

| PREFERRED P/N  | UNIT WEIGHT(g)   | MINIMUM PACKAGE(pcs) | INNER BOX QUANTITY(pcs) | OUTER CARTON QUANTITY(pcs) | DELIVERY MODE |
|----------------|------------------|----------------------|-------------------------|----------------------------|---------------|
| MUR1660CT /FCT | Approximate 1.88 | 50                   | 1000                    | 5000                       | Tube          |

### ■Characteristics (Typical)

FIG1:  $I_o$  -  $T_c$  Curve

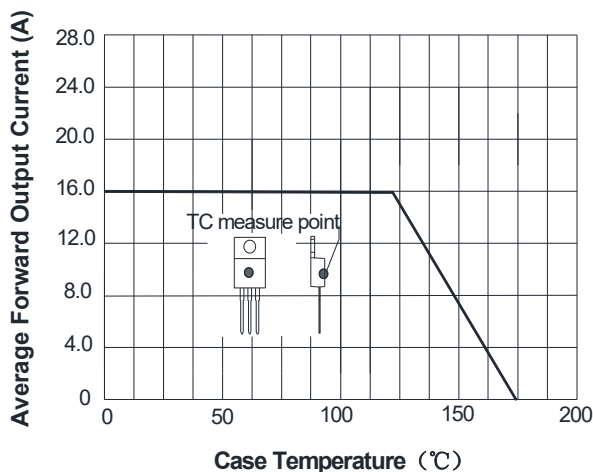


FIG2: Surge Forward Current Capability

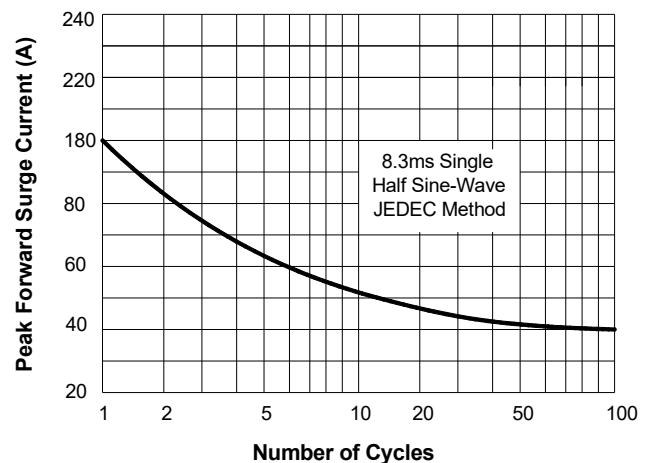


FIG3: Forward Voltage

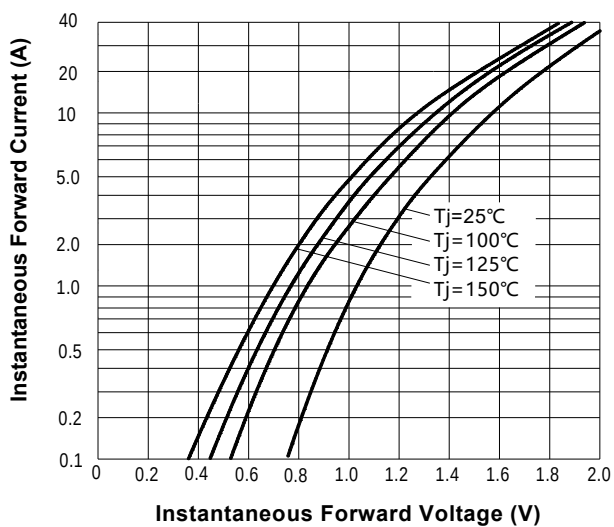


FIG.4: Instantaneous Reverse Characteristics



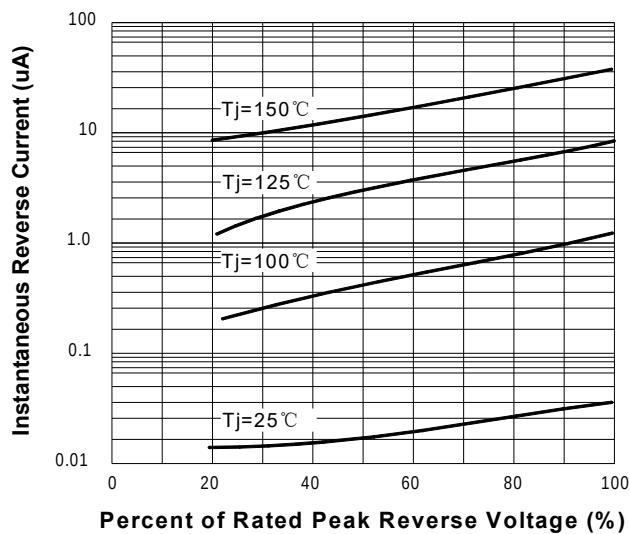



FIG.5: Diagram of circuit and Testing wave form of reverse recovery time

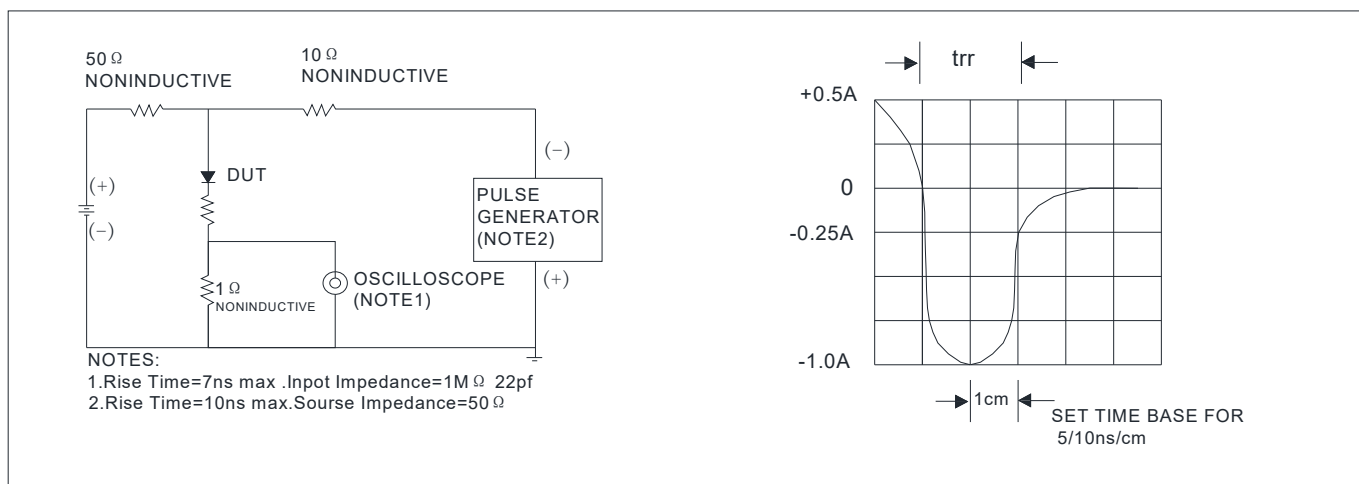

## ■Outline Dimensions

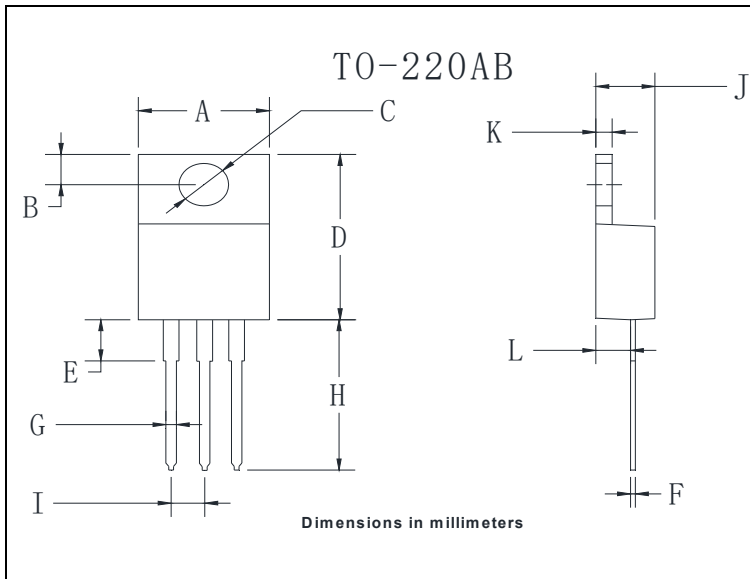

| TO-220AB |       |       |
|----------|-------|-------|
| Dim      | Min   | Max   |
| A        | 9.95  | 10.35 |
| B        | 2.55  | 2.95  |
| C        | 3.8   | 4.0   |
| D        | 14.95 | 15.25 |
| E        | 3.75  | 4.25  |
| F        | 0.26  | 0.5   |
| G        | 0.68  | 0.94  |
| H        | 13.4  | 13.9  |
| I        | 2.35  | 2.65  |
| J        | 4.38  | 4.78  |
| K        | 1.14  | 1.4   |
| L        | 2.37  | 2.79  |

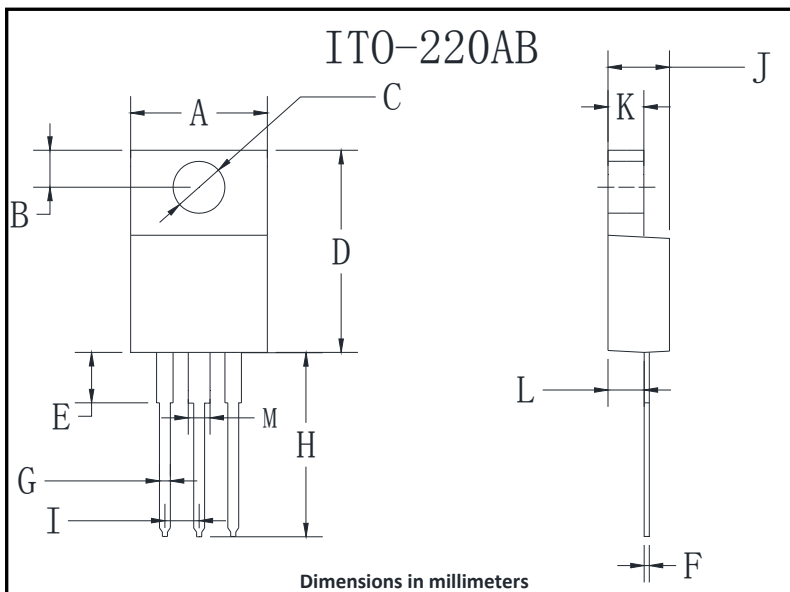

| ITO-220AB |       |       |
|-----------|-------|-------|
| Dim       | Min   | Max   |
| A         | 9.8   | 10.2  |
| B         | 2.25  | 2.75  |
| C         | 2.95  | 3.45  |
| D         | 14.75 | 15.25 |
| E         | 3.05  | 3.95  |
| F         | 0.45  | 0.75  |
| G         | 0.45  | 0.75  |
| H         | 13.4  | 14.2  |
| I         | 2.35  | 2.75  |
| J         | 4.3   | 4.8   |
| K         | 2.58  | 2.82  |
| L         | 2.58  | 2.82  |
| M         | 1.47  | 1.77  |

| Packge   | Pcking     | Box Size<br>L×W×H(mm) | Quatity(pcs/box) | Carton Size<br>L×W×H(mm) | Quatity(pcs/carton) |
|----------|------------|-----------------------|------------------|--------------------------|---------------------|
| TO-220AB | 50pcs/Tube | 560×150×50            | 1000             | 570×290×180              | 5000                |